




(45 3") **Working Height Max.** 13.8 (31 2")9.5 **Overall Lift Capacity Max.** (705) 320 (3 10") **Overall Width** 1.18 2.48 **Overall Length** (8 2") **Overall Weight** 2,800 (6,172)

LS1212H Electric Scissor Lifts H-Drive

LS1212H SPECIFICATIONS >>>

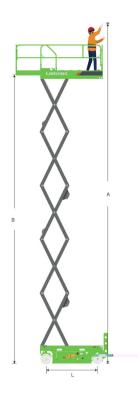





DIMENSIONS	
'A A (A / V)	13. / . m (4 3"/312")
. 1m _ (\lambda \lambda	11. / . m (3 " / 24 ")
. 1 m n ()	1.4 m (4 10")
. 1 m , A. n	2.4 m (2")
. 1 m · n	1.1 m (3 ")
,. ,Λ·Λ , (" υ)	0. m (2 11")
,	2.4 m (2")
	2.2 m (")
·	1.1 m (3 10")
	2. 2 m (")
	2.1 m (11")
. N. C	1. m (2")
	100 mm (4")
., - UA 1, A . (A1 1 .)	20 mm (0. ")

PRODUCTIVITY			
	320 (0)		
, A ' A , '	120 . (2 41)		
- m v - A (A - / V -)	2/1		
· (.)	2 m/n (1.2 m n)		
· (·)	0.4 m/n (0.2 m n)		
u nn _ 'v. (n.' . / v.' .)	0.24 / 2.3 m (" / ")		
· /	0/ .		
, ,- Y	2 %		
1 . A 11 A (1)	1 / 3.		
1, 1, (i A-m. 1A,)	3 1 12 mm (1 3" ")		

POWER	
e	24 / 22 n
' n' vm (' ' \L')	24 / 230 n
n.,	24 / 30
**A	24 / 3.3
L. U' . , M IVM	2 (4)
ב. מ' ב. '	20 (1 2)

WEIGHT		
11	2. 00	(.1 21)