


Working Height Max. Horizontal Reach Max. Overall Lift Capacity Max.


**Overall Width and Length** 

28.1 m (92'2") 19.28 m (63'3") 300 / 454 kg (661 / 1000 lb) 2.44 m x 11.03 m (8' x 36'2")

## LT26JE Telescopic Boom Lifts-Electric

## LT26JE SPECIFICATIONS >>>

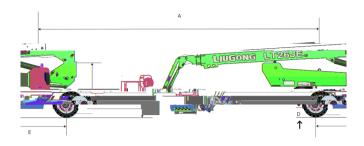



DIMENSIONS	
Working Height Max.	28.1 m (92'2")
Platform Height Max.	26.1 m (85'8")
Operating Amplitude Max.	19.88 m (65'3")
Horizontal Reach Max.	19.28 m (63'3")
Platform Size (LxWxH)	2.44 x 0.91 x 1.1 m (8' x 2'11" x 3'7")
A. Length (Stowed/Transport)	11.03 / 11.31 m (36'2" / 37'1")
B. Width (Stowed/Transport)	2.44 / 2.28 m (8' / 7'6")
C. Height (Stowed/Transport)	2.88 / 2.68 m (9'5" / 8'10")
D. Ground Clearance	0.3 m (11")
E. Wheelbase	3 m (9'10")

PRODUCTIVITY	
Overall Lift Capacity Max.	300 / 454 kg (661 / 1000 lb)
Platform Occupancy Max.	2
Platform Rotation	± 90°
Vertical Jib Rotation (Up/Down)	-65° ~ +70°
Turntable Rotation	360° Continuous
Turntable Tailswing (Boom Raised/Stowed)	1.6 / 2.6 m (5'3" / 8'6")
Drive Speed (Stowed)	5 km/h (3.1 mph)
Drive Speed (Raised)	1 km/h (0.6 mph)
Gradeability	45 %
Tilt Sensor Activation (Side to Side/Front to Back)	X 5° / Y 5°
Turning Radius (Inside/Outside)	3.5 / 6.8 m (11'5" / 22'4")
Tire Size (Solid Off-road)	385 / 65 - 24
Drive Steering Type	4WD x 2WS

WEIGHT	
Overall Weight	15,000 kg (33,069 lb)

POWER	
Battery (Lithium)	83.2 V / 460 Ah
Charger	80 V / 80 A
Lifting Motor	AC 30 kW
Drive Motor	AC 5.2 kW
Auxiliary Power Unit	12 VDC
Hydraulic Tank Capacity	140 L (36 gal)

